

FVS 95 Flexible Video-scope

The FVS 95 is a 0.95mm diameter Flexible Video-scope for the ultimate image inside very small objects.



COUNTERMEASURES

The FVS 95 is the first sub 1.0mm 'all-in one' videoscope with built in glass fibre illumination. It provides unprecedented full-screen clarity for an instrument of such small diameter.

A 500mm length stainless steel braid covered flexible probe contains a 1/11" CMOS camera sensor. A colour 160,000 pixel video image is displayed on the 5" LCD screen. Recording is simple. Short press the image button for JPEG images, and long press the same button to start and stop MP4 video recording.

Illumination is controlled with one button, which cycles through stepped output levels, providing the ideal amount of light for your application.

The probe is interchangeable, meaning in the event of breakage only the probe needs to be replaced, not the entire unit. In addition, other sized probes may be used with the same unit. *Please note that the 0.95mm diameter probe has no articulation control. It is not possible to contain control wires inside this very small diameter.

The supplied rechargeable battery clips to the handle of the unit and provides approximately 4 hours working time. On the side of the unit is a TF card slot, micro USB port and HDMI socket.

The whole kit is supplied in a heavy duty carry case, containing battery, charger, cables and a micro SD/TF card.

FEATURES

- ▶ **Crystal clear full screen video image+**
- ▶ **Tiny 0.95mm diameter** stainless steel braided flexible probe+
- ▶ **Built in glass fibre illumination**
– adjustable output level with no unwanted LED reflection on screen
- ▶ **Easy image and video capture** in compatible formats
- ▶ **4 hours operation time**



FVS 95 Flexible Video-scope

Contents and Specifications





MAIN COMPONENTS

Construction

- Flexible probe – stainless steel braid covered
- Display unit ABS plastic

Camera / Flexible probe

- 1/11" CMOS colour sensor
- 0.95mm diameter x 500mm length
- 0° forward viewing
- 120° field of view
- DOF / focus range 3-70mm
- DC 5V, 200mA
- Resolution 160,000 pixels
- High power 6 step glass fibre illumination
- LED light source built inside display unit
- *No articulation control of tip
- Removeable probe section – replacement probes may be used with the display unit

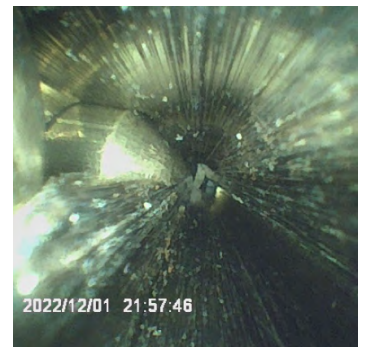

FVS 95 Flexible Video-scope



GENERAL SPECIFICATIONS

5 inch industrial LCD screen	Ports:	TF card 32gb max, HDMI, micro usb
Power:		Lithium battery pack. Operating time ~4 hours
Ingress protection:		IP54
Working temp:		-10°C~50°C
Storage temp:		-20°C~60°C
Humidity Max:		95% no condensation
File Format Image:		JPEG (JPG), Video: AVI
Image functions:		Freeze, zoom, photo, flip, video playback
DISPLAY UNIT:		Dimensions - 350 x 155 x 69 mm
CASE:		Supplied in tough fitted carry case
		Weight - 3.9 kgs
		Dimensions - 48 x 39 x 16 cms